


FUEL SYSTEM


Secure the carburetors together with the two attaching screws.

(1) SCREWS

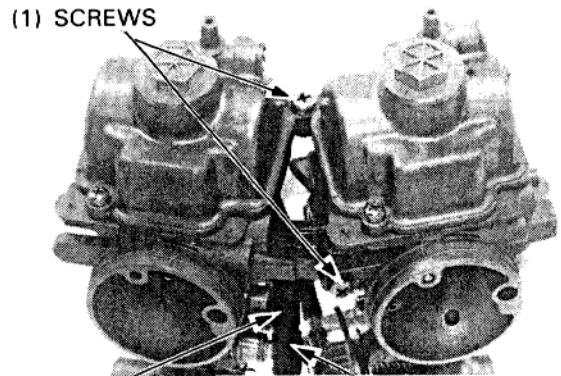


(2) BALL JOINT (3) SECONDARY THROTTLE DRUM

Align the groove of the throttle stop screw bracket with the air vent tube and install the bracket on the carburetor body with the two attaching screws.

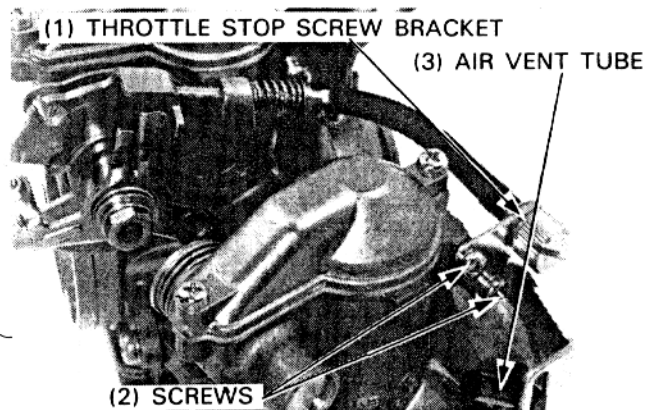

Inspect throttle operation as described below:

- Open the throttle slightly by pressing on the throttle linkage. Then release the throttle.
- Make sure that there is no drag when opening and closing the throttle.

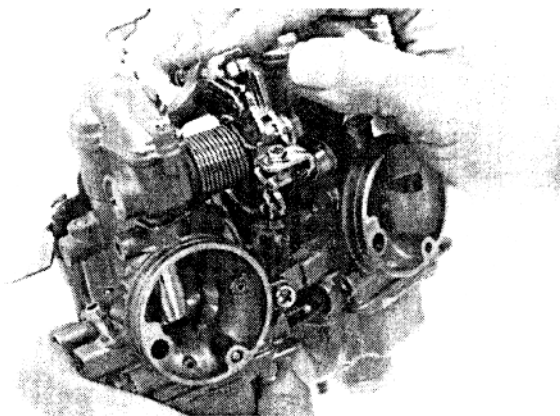

CARBURETOR INSTALLATION

Installation is essentially the reverse of removal.

NOTE

- Route the throttle cables properly (page 1-9 to 1-11).

Perform the following inspections and adjustments.

- Throttle operation (page 3-5).
- Idle speed (page 3-9).

